


Technical drawing of a floor construction cross-section. The drawing shows a concrete slab with a PE film (PE-Folie) and a base layer (L1). The width of the slab is 15cm, and the height is 15cm. The base layer (L1) has a thickness of 0,5cm. The drawing also shows a side view of the slab with a width of 15cm and a height of 15cm. The base layer (L1) has a thickness of 0,5cm. The drawing is labeled with 'Sockelmaß' (base dimension), 'PE-Folie' (PE film), and 'L1' (base layer). The drawing is a technical drawing of a floor construction cross-section.

	Sperrschicht Bitumenpappe
	unbewehrter Beton C 20/25
	Sperrschicht PE-Folie
	Grobkies
	tragfähiger Baugrund
	Montage- & Wartungsbereich @ (Freifläche)

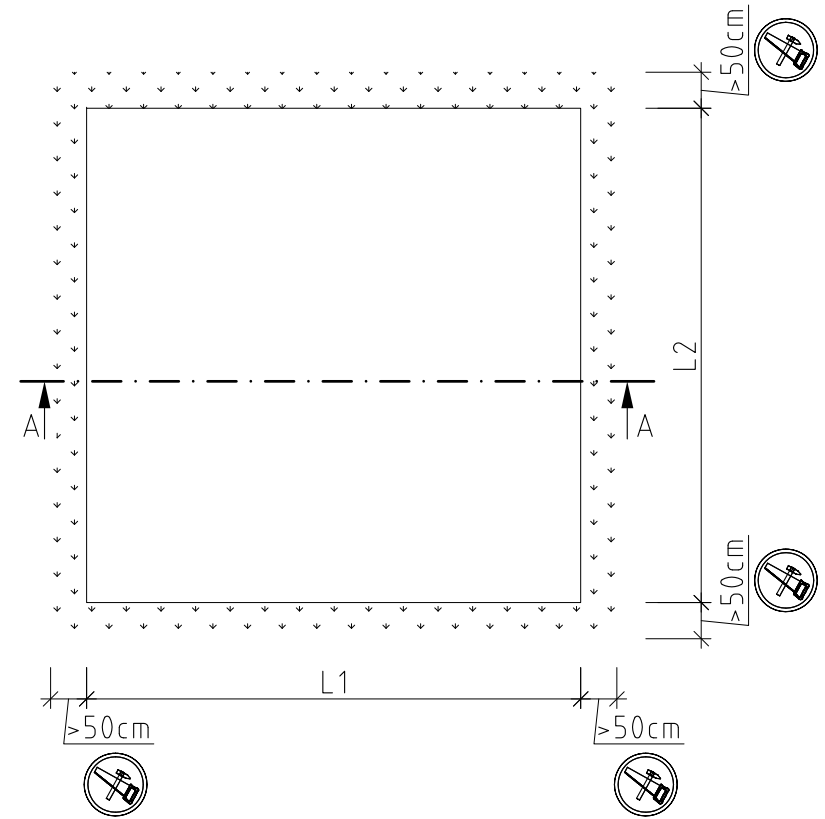

L2 = Sockelmaß des Hauses
abzüglich 1cm

DE	Eine Baufreiheit (ebene Fläche) von mind. 50 cm umlaufend um das Fundament, für das sichere Aufstellen von entsprechenden Leitern, muss gewährleistet sein.
ENG	A construction clearance (flat surface) of at least 50 cm all around the foundation for the safe installation of appropriate conductors must be guaranteed.
FR	Un dégagement de construction (surface plane) d'au moins 50 cm tout autour de la fondation pour l'installation sûre des conducteurs appropriés doit être garanti.

Technische Änderungen vorbehalten				Darstellung: Fundamentplan Gartenhaus	Maßstab:	
	Zeichner:	Genehmigt:	Datum:		angepasst	
Erstellt:	Ehlert	Schott	13.03.2019		Blatt-Nr.:	
Geändert:	Belling @	Belling	05.06.2020		1/1	

